



Datasheet


LL01CI-WL40L02

Available Distribution



40°

LED



CITIZEN
CLL030


CREE
CXA1820

Dimensions

Part Number	Diameter	Height
LL01CI-WL40L02	Ø49.2	9.5

*All dimensions are in millimeters.

Packaging Details (SPQ)



Recommend Applications



Architectural

Commercial

Spotlight

General Information



- Lens Material PC LEV1700KL
- Operating Temperature -40°C~+110°C
- UL Flammability V-2 @1.5mm
- UL RTI Elec 130°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

✓ If necessary, Clean lenses with mild soap, water and soft cloth.

⚠ Never use any commercial cleaning solvents on lenses, like alcohol.


⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Mechanical Specification

*All dimensions are in millimeters.

Lens Dimension


LL01CI-WL40L02

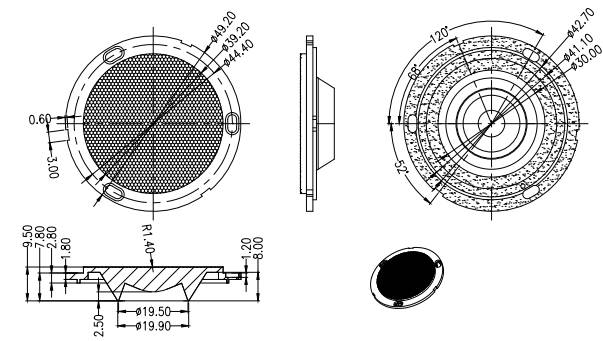

Assembly Instruction

Part No LL01CI-WL40L02



Fixing Method

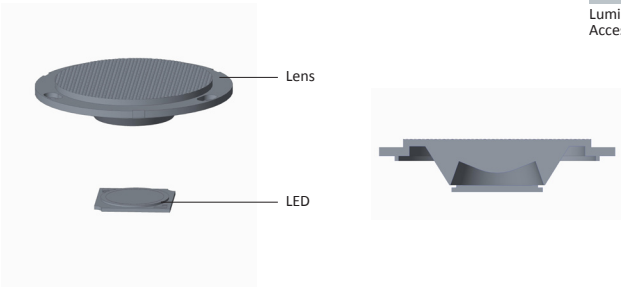

Photometric Distribution

Distribution

40°



Details by LED

Part No	Connector	LED Package Size	LED
LL01CI-WL40L02	-	LES Ø14.5~16	 CITIZEN CLL030  CREE CXA1820

LED	Part No	FWHM	cd/lm	IES
 CITIZEN CLL030	LL01CI-WL40L02	46°	1.0	↓
 CREE CXA1820	LL01CI-WL40L02	42°	1.1	↓

Product Nomenclature

Ledlink Led Type Lens Angle
LL 01 CI- WL 40 L02
Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc

Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.5, TianKeng Industrial Dist., HengLi Town, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

