

Datasheet

LL01DB-BGO200L55

Available Distribution



160°

Dimensions

Part Number	Diameter	Height
LL01DB-BGO200L55	Ø 17.8	5.42


*All dimensions are in millimeters.

LED



SEOL
ZSM4

Packaging Details (SPQ)




Recommend Applications



Backlight

General Information




- Lens Material PMMA MG5
- Operating Temperature -40°C~+70°C
- UL Flammability HB @1.5mm
- UL RTI Elec 99°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%
- ✓ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Mechanical Specification



*All dimensions are in millimeters.

Lens Dimension

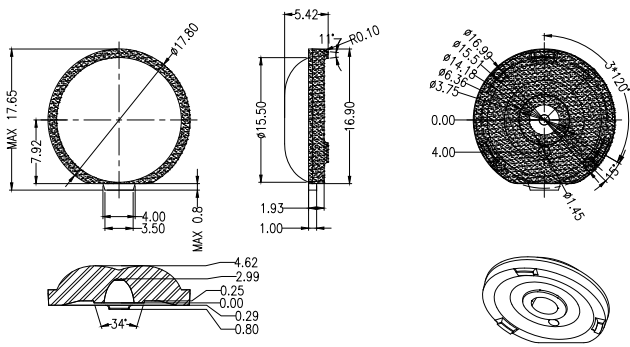

Assembly Instruction

Fixing Method




Recommended assembly


- OD:30mm



Lighting effects

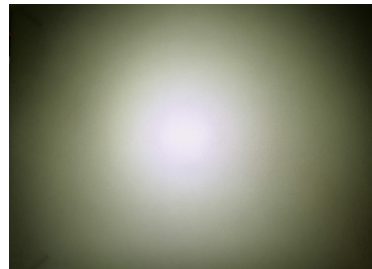

Photometric Distribution

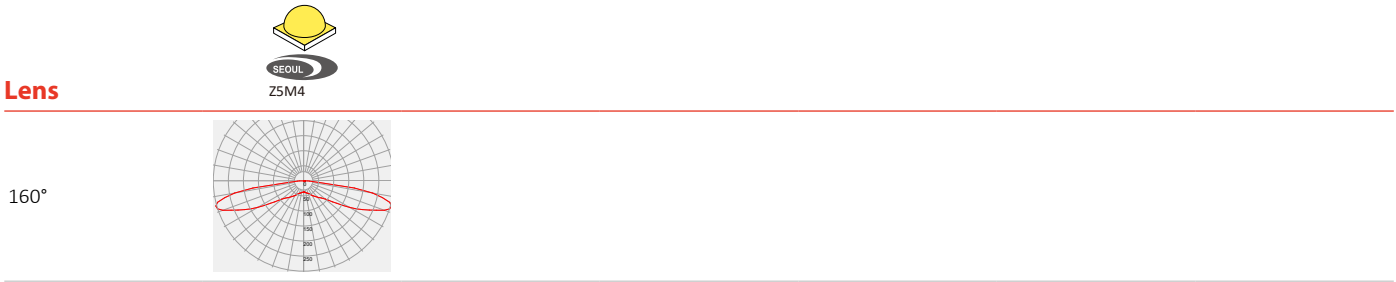

Details by LED

Part No	Accessories	LED Package Size	LED
LL01DB-BGO200L55	-	3535	

LED	Part No	FWHM	cd / lm	IES
	LL01DB-BGO200L55	164°	0.3	↓

Product Nomenclature

Ledlink Led Type Lens Angle
LL 01 DB- BGO 200 L55
Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc

Taiwan HQ

15F, No.655,Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.6, Gaoxin Road, Tiankeng, Hengli Town, Dongguan City,
Guangdong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

