



Datasheet

LL01ED-AVX160L06

Available Distribution



160°

Dimensions


Part Number	Diameter	Height
LL01ED-AVX160L06	Ø15.55	5.5

*All dimensions are in millimeters.

LED



Packaging Details (SPQ)



Recommand Applications



Backlight

General Information




- Lens Material PMMA 8N
- Operating Temperature -40°C~+70°C
- UL Flammability HB @1.5mm
- UL RTI Elec 90°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%
- ✓ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Mechanical Specification


*All dimensions are in millimeters.

Lens Dimension

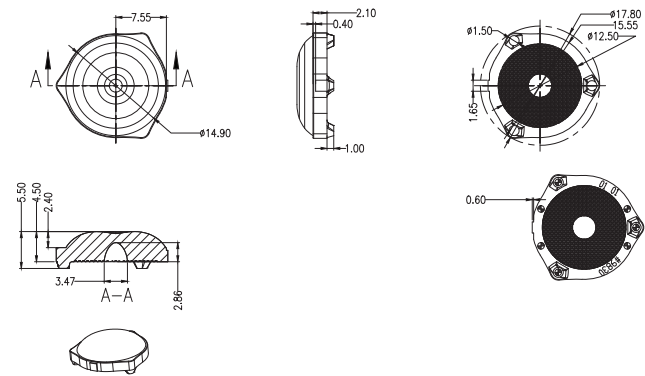

Assembly Instruction

Fixing Method

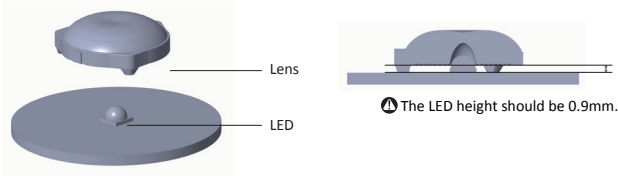

Recommended Assembly


- OD:30mm



Lighting Effects



Photometric Distribution

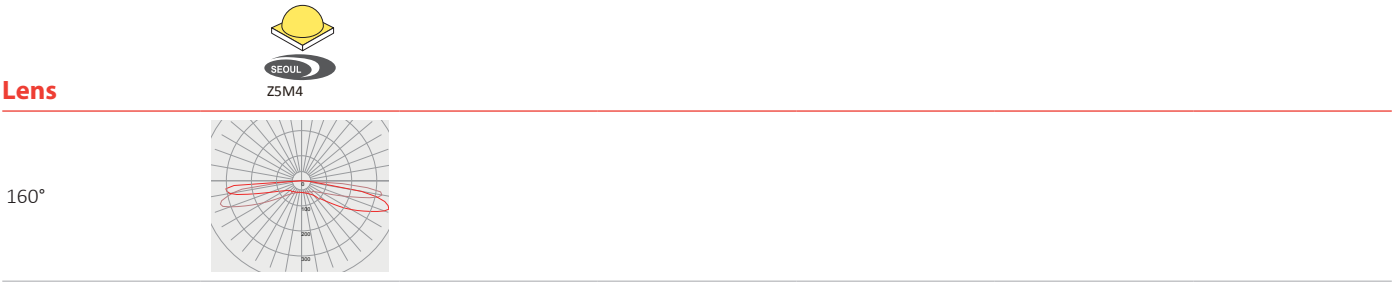

Details by LED

Part No	Accessories	LED Package Size	LED
LL01ED-AVX160L06	-	3535	 Z5M4

LED	Part No	FWHM	cd / lm	IES
 Z5M4	LL01ED-AVX160L06	167°	0.3	

Product Nomenclature

Ledlink Led Type Lens Angle
LL 01 ED -AVX 160 L06
Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc

Taiwan HQ

15F, No.655,Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.5, TianKeng Industrial Dist., HengLi Town, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

