


Datasheet

LLL01ZZ-DYB××L06

Available Distribution



Dimensions

Part Number	Height	L×W
LLL01ZZ-DYB60L06	6.5	
LLL01ZZ-DYB90L06	6.89	1140×26.15
LLL01ZZ-DYB65105L06	6.2	


*All dimensions are in millimeters.

LED



LUMILEDS
LUXEON 3030 2D

Packaging Details (SPQ)



Recommend Applications




Commercial



Indoor

General Information




- Lens Material PMMA 8N
- Operating Temperature -40°C~+70°C
- UL Flammability HB @1.5mm
- UL RTI Elec 90°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%
- ☑ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Mechanical Specification




*All dimensions are in millimeters.

Lens Dimension

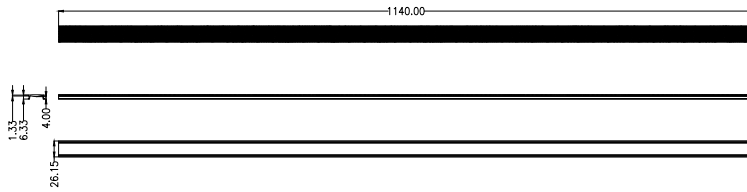

Assembly Instruction

Fixing Method

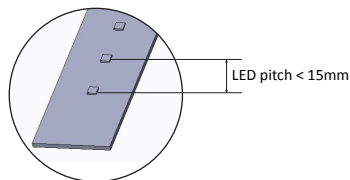


Photometric Distribution




LUMILEDS
LUXEON 3030 2D

Distribution


60°




90°




65°x105°




Details by LED

Part No	Accessories	LED Package Size	LED
LL01ZZ-DYBxxL06	-	LESØ:2.6	 LUMILEDS LUXEON 3030 2D

LED	Part No	FWHM	cd / lm	IES
 LUMILEDS LUXEON 3030 2D	LL01ZZ-DYB60L06	74°	0.4	↓
	LL01ZZ-DYB90L06	99°	0.3	↓
	LL01ZZ-DYB65105L06	75°×104°	0.4	↓

Product Nomenclature

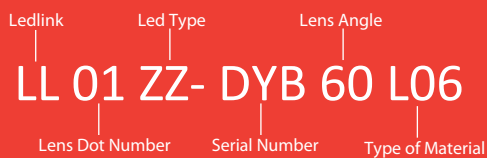

Ledlink Optics, Inc

Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.5, TianKeng Industrial Dist., HengLiTown, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

