


Datasheet

LL01BR-ETIxxL191-M2

Available Distribution




LED



Recommand Applications



General Information





- Lens Material PMMA 20HR
- Operating Temperature -40°C~+70°C
- UL Flammability HB @1.5mm
- UL RTI Elec 50°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%
- ✓ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Dimensions

Part Number	Diameter	Height
LL01BR-ETIxxL191-M2	Ø55	12.67

*All dimensions are in millimeters.

Packaging Details (SPQ)



Accessories




- Available with Holder LL01ZZADW01H2
- Available with Connector LL01A00CYPB2

Mechanical Specification

*All dimensions are in millimeters.


Lens Dimension

LL01BR-ETI××L191

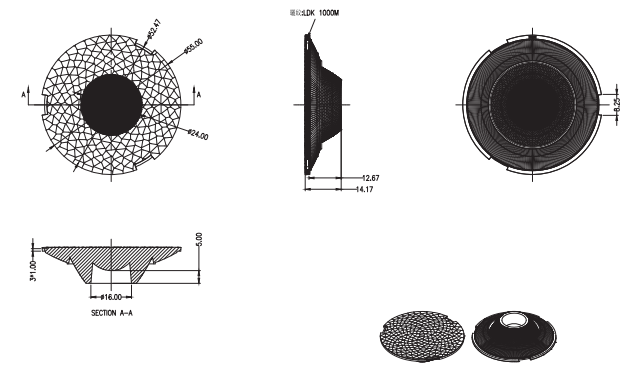


Holder Dimension

LL01ZZADW01H2

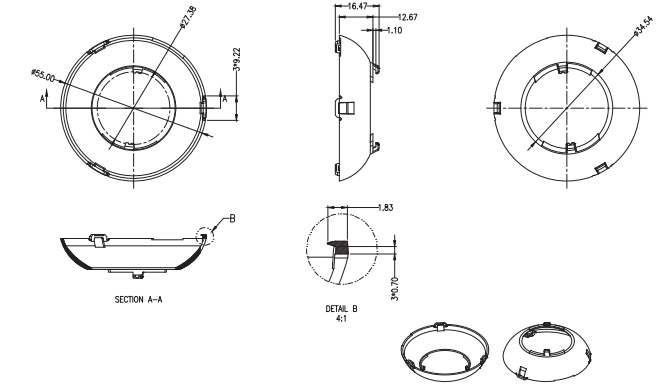

Connector Dimension


LL01A00CYPB2

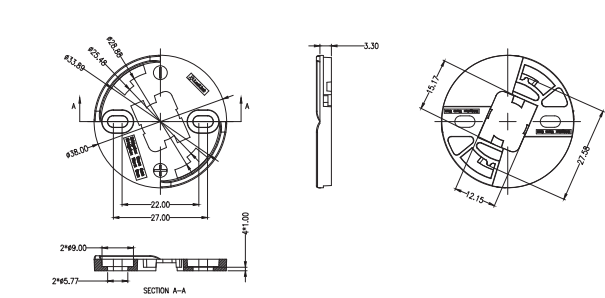

Assembly Instruction

Fixing Method

Part No LL01BR-ETI××L191-M2
Holder LL01ZZADW01H2
Connector LL01A00CYPB2
LED Bridgelux DTW 9mm

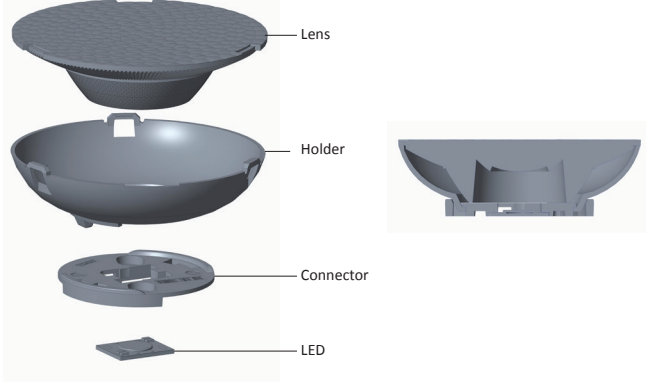


Photometric Distribution




LED

24°



38°



Details by LED

Part No	Holder	Connector	LED Size	LED
LL01BR-ETI××L191-M2	 LL01ZZADW01H2	 LL01A00CYPB2	LES Ø9.3	 bridgelux. Vesta DTW 9mm

LED	Part No	FWHM	cd / lm	IES
 bridgelux. Vesta DTW 9mm	LL01BR-ETI24L191-M2	24°	2.9	
	LL01BR-ETI38L191-M2	36°	1.2	

Product Nomenclature

LL 01 BR- ETI 24 L191- M2

Ledlink Led Type Lens Angle Holder

Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc
Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd
Dongguan Factory

No.6, Gaoxin Road, Tiankeng, Hengli Town, Dongguan City,
Guangdong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd
Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

